
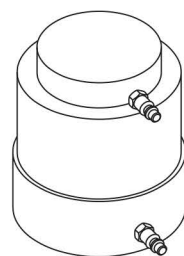


# PNEUMATIC SHUT OFF VALVE AV-T

3A Weld / Tri-Clamp / Bevel Seat / IDF / RJT/BSM/ CIP Flat Face / DIN 11851 / SMS 1145 Threaded Male 外牙接口


## 氣動截止閥 / T 閥

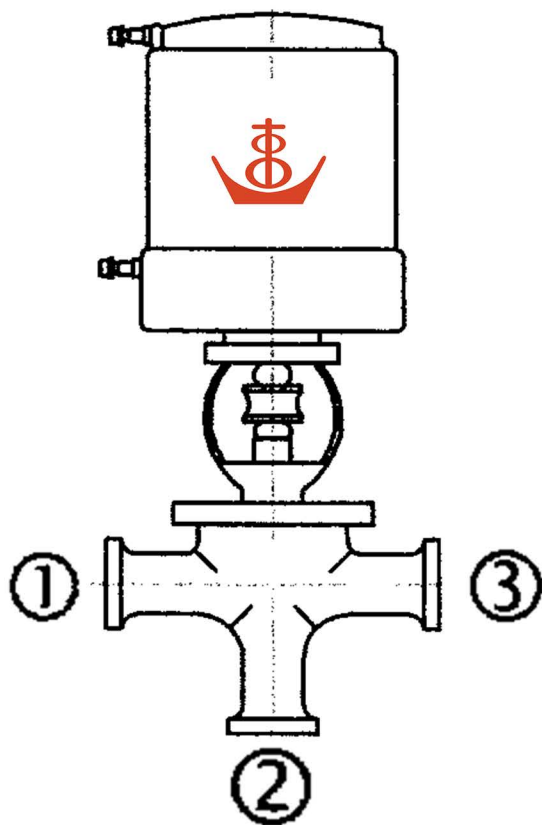

Pneumatic Actuator  
氣動筒 SS304



Actuator Clamp  
氣動筒管束  
13MHMM SS304



Bonnet, T type  
T接帽 SS316



Body Gasket  
AVA矽膠体墊 Silicone




Body Clamp  
閥体管束  
13MHMM SS304

**N.C. - Normally close port 2, open port 1, 3.**  
Air to all open.

**N.O. - Normally all open.**  
Air to close port 2.

常閉: 接口 2 閉, 接口 1, 3 通。  
氣動時, 全部接口通。

常開: 全部接口通。  
氣動時, 閉接口 2。



T Stem/Seat Plug Assembly  
T塞桿組

T塞桿組包含 T Stem(T塞桿) SS316 及  
以下消耗品:

Silicone Oring \*2 (2個 矽膠O環)  
PTFE Snap-On Seat \*1 (1個 TEFLON塞膠)



Lower Body E, 3 ports  
E型三口体 SS316

### N.C. (Normally Close, Air to Open) 常閉

Pneumatic upward movement, Spring return 氣動時塞桿向上運動, 彈簧作用時塞桿返回

### N.O. (Normally Open, Air to Close) 常開

Pneumatic downward movement, Spring return 氣動時塞桿向下運動, 彈簧作用時塞桿返回